



ОКЮЛП 590586728

**Открытое акционерное общество
"Лидагропромаш"**

**Open joint stock company
"Lidagroprommash"**

Республика Беларусь
ул. Игнатова, 52, 231300, г. Лида, Гродненская обл.
Тел.: приемная тел/ факс (0154) 54 24 54.
E-mail: priemnavalapm@mail.ru,
IBAN BY82BLBB30120590586728001013 в ЦБУ №228 г. Лида
ОАО «Белинвестбанк», г. Лида, ул. Мицкевича, 39
BIC BLBBBY2X, УНП 590586728

231300, Lida, st. Ignatova, 52, Republic of Belarus
Tel/fax: (0154) 54 24 54
E-mail: priemnavalapm@mail.ru
IBAN BY82BLBB30120590586728001013 in CBU №228
JSC Belinvestbank, Lida, st. Mickiewicz, 39, Republic of Belarus
BIC BLBBBY2X, UNP 807000028

05.02.2021 № 11-06/_____

Business proposal

OJSC «Lidagroprommash» offers you to consider the possibility of purchasing a mounted disc mower KDN-3.1:


MOUNTED DISC MOWER KDN-3,1

It is intended for mowing beans, legume-cereal, cereal grasses with laying of sloping mass in the mowing in fields and meadows cleared of stones and solid objects



Your cutting edge

- Robust and fully welded cutterbar
- Long-lasting spur gears
- Wedge-shaped cutterbar without inner shoe for cleanest cuts
- Convenient and quick-change blades (Not available in North America)

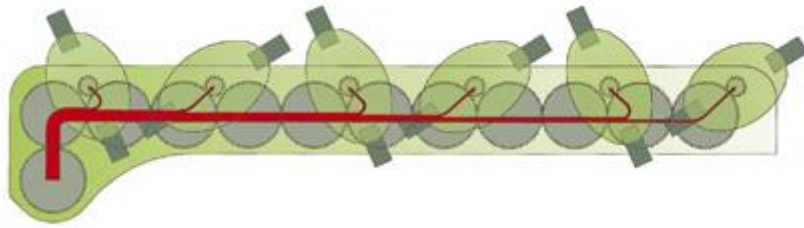

Smooth and heavy-duty driveline: Massive and heavy-duty spur gears with up to 59 teeth take the pto power and transfer it to the discs without losses, ensuring each disc is driven full power. Each of the auxiliary gears uses smaller spur gears to drive one disc at a time, a design that minimizes the load on each gear and results in quiet running and longevity.

The working formula



The working formula

- Tractor link fitting pins for full-width efficiency
- Direct and frictional driveline ensures no power is lost
- Suspension springs adjust to optimize ground pressure
- Large pivoting angle suits work on steep side slopes



Constant-velocity and high-power driveline: Drive power flows through a frictional driveline of pto shafts and gears, a system that warrants an efficient transfer of power from the tractor down to the cutterbar discs – even in difficult conditions.



Absolutely safe. Break-back system relies on an adjustable coil spring, which responds instantly and dependably and allows the mower to swing back and up when impacting a foreign object.

Reliable and practical!



Technology that delivers

- High workrates
- Low input
- Light weight
- Excellent value for money

You can rely on such machinery

You can be sure that you are using first-class machinery which wins with advanced technologies and impressive productivity. They have won world fame as perfectly stable mowers distinguished by excellent quality of mowing.



Linear crop flow. Disc mowers without conditioner feature a cantilevered guard that makes for an unobstructed flow of the material through the machine, delivering uniform swaths that speak for themselves.



Operator comfort on the headland: On the headland, the mower is raised hydraulically to enable convenient turns and avoid running on cut material. The link arms are not raised. A stop limits the lift range.

Operating conditions:

- Tractor should be equipped with forward ballast weights of at least 440 kg.
- It is not allowed to use on sites clogged with stones larger than 50 mm.
- On the fields cleared of stones and peat bogs it is allowed to use a mower without installing skids for high mowing.

TECHNICAL CHARACTERISTICS

Name of the parameter	Value
Machine type	mounted
Aggregation, drawbar category	2,0
Working speed, km/h	up to 15
Transport speed, km/h	up to 20
Coverage, m	3,1±0,1
Productivity (ha/h)	2,2-4,2
Number of mowing discs, pcs.	5
Number of mowing drums, pcs.	2
Linear cutting speed at the ends of the knives at nominal PTO rpm, m/s	85
Weight, kg, no more	900
Overall dimensions in the transport position aggregated with the tractor, mm, no more length/width/height	6000/3000/4000
Overall dimensions of the mower, mm, no more	2000/ 5200/1400

length/width/height	
Drive type of working tools	mechanical from PTO tractor
Cutting height, mm: - without skids - with skids	40-60 60-100
Width of the formed swath, m	2,2±0,2
Cutting losses, %, no more	2
Service life, years	10

**Conformity certificate STB ISO 9001.
Customs tariff number 8433.**

- WARRANTY-24 MONTHS
- FREE TRAINING OF MACHINE OPERATORS IS PROVIDED BY SPECIALISTS OF THE MANUFACTURER.
- INDIVIDUAL APPROACH TO THE CLIENT.
- CONSTANT AVAILABILITY OF SPARE PARTS IN THE WAREHOUSE OF THE MANUFACTURER AND DEALER.

The cost for 05.02.2021, the VAT rate-0% is:

Mounted disc mower KDN-3.1 – 15 790,00 USD

Payment terms: 100% prepayment.

Term of shipment of the Goods is within 30 calendar dates from the date the advance payment reaches the Seller's account.

Products shall be delivered to the Buyer on FCA terms, warehouse of the Supplier Lida city, Ignatov street, 52, the Republic of Belarus (Incoterms 2020).

The commercial offer is valid for 30 calendar days.