



ОКЮЛП 590586728

**Открытое акционерное общество
"Лидагропромаш"**

**Open joint stock company
"Lidagroprommash"**

Республика Беларусь
ул. Игнатова, 52, 231300, г. Лида, Гродненская обл.
Тел.: приемная тел/ факс (0154) 54 24 54.
E-mail: priemnavalapm@mail.ru,
IBAN BY82BLBB30120590586728001013 в ЦБУ №228 г. Лида
ОАО «Белинвестбанк», г. Лида, ул. Мицкевича, 39
BIC BLBBBY2X, УНП 590586728

231300, Lida, st. Ignatova, 52, Republic of Belarus
Tel/fax: (0154) 54 24 54
E-mail: priemnavalapm@mail.ru
IBAN BY82BLBB30120590586728001013 in CBU №228
JSC Belinvestbank, Lida, st. Mickiewicz, 39, Republic of Belarus
BIC BLBBBY2X, UNP 807000028

05.02.2021 № 11-06/_____

Business proposal

OJSC «Lidagroprommash» offers you to consider the possibility of purchasing a versatile air drills:

SPU VERSATILE AIR DRILLS



They are intended for sowing practically all cereals, leguminous and herbaceous crops, such as: wheat, rye, barley, oats, peas, lupins, clover, vetch, turnips, etc.

The seeder is mounted, equipped with a coupler automatic SA-1, is aggregated with tractors of classes 1,4 and 2,0 with independent drive PTO and frequency of its rotation of 1000 rpm.

VARIANTS OF THE PACKAGE:

- working width — 3 m, 4 m, 6 m;
- coulter design — anchor, disc, linen;
- additional options: technological track, pelletizing machine, chain-latching.



Anchor



Disk




Linen

ADVANTAGE

- simple design and versatility;
- possibility to choose different types of working bodies (openers);
- possibility of using both for sowing grain and leguminous crops, and for sowing grasses with the possibility of stepless adjustment of the seeding rate;
- the seeder is equipped with automatic seed level control in the hopper and the operation of the seeders;
- at the request of the consumer, the litter can be equipped with a system for overlapping the vases depressors to form a "technological track".

Central dosing is the heart of the system. Through the sowing apparatus of the coil type, the sowing mass is consumed in a strictly defined quantity. The edges of the coil are protected by a rubber seal 2a, so that the seed material is not susceptible to damage, and when shaking it can not uncontrollably spill. The brush 2c cleans the grooves from the stuck seeds during operation. Smooth adjustment of the seeding rate is carried out by changing the depth of grooves of the coil 2 of the sowing apparatus. Seeds from the sowing apparatus fall into the injector 3, move with the airflow from the fan 1, are transported upwards to the distributor 4, uniformly mixing in the shaft pipe and from there further to the openers.

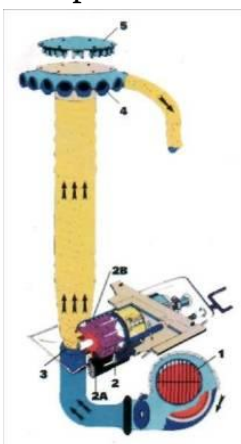

TECHNICAL CHARACTERISTICS

Universal pneumatic seeders with anchor Coulter

Specifications	SPU3	SPU4	SPU6
Working width, m	3,0	4,0	6,0
Coulter design	anchor	anchor	anchor
Operating speed, km/h	5-12	5-12	5-12
Hopper capacity, dm, no less	500	500	1000
Seeding rate, kg/ha	2-400	2-400	2-400
Number of rows	24	32	48
Row spacing, cm (standart)	12,5	12,5	12,5
Depth of seeding, mm	20-50	20-50	20-50
Drill weight, kg, no more	670	780	1260
Operating rate in basic time, hectares per hour	1,5-3,6	2,0-4,8	3,0-7,2
Overall size in working position, mm, no more than:			
Length	2140	2140	2140
Width	4800	6800	10800
Height	1960	1960	1960
Overall size in transport position, mm, not more than:			
Length	2200	2200	7000
Width	3100	3100	2500
Height	2350	2350	2200
Mounted jn tractor s with drawbar categoru	1,4	1,4	1,4;2,0

TECHNICAL CHARACTERISTICS

Universal pneumatic seeders with disk Coulter

Specifications	SPU3D	SPU4D	SPU6D
Working width, m	3,0	4,0	6,0
Coulter design	disk	disk	disk
Operating speed, km/h	5-12	5-12	5-12
Hopper capacity, dm, no less	500	500	1000
Seeding rate, kg/ha	2-400	2-400	2-400
Number of rows	24	32	48
Row spacing, cm (standart)	12,5	12,5	12,5
Depth of seeding, mm	20-50	20-50	20-50
Drill weight, kg, no more	760	870	1360
Operating rate in basic time, hectares per hour	1,5-3,6	2,0-4,8	3,0-7,2
Overall size in working position,			

mm, no more than:			
Length	2250	2250	2250
Width	4800	6800	10800
Height	1960	1960	1960
Overall size in transport position, mm, not more than:			
Length	2350	2350	7000
Width	3100	3100	2500
Height	2350	2350	2200
Mounted jn tractor s with drawbar categoru	1,4	1,4	1,4;2,0

TECHNICAL CHARACTERISTICS

Universal pneumatic seeders with disk Coulter

Specifications	SPU4L	SPU6L
Working width, m	4,0	6,0
Coulter design	linen	linen
Operating speed, km/h	5-12	5-12
Hopper capacity, dm, no less	500	1000
Seeding rate, kg/ha	15-268	15-268
Number of rows	64	96
Row spacing, cm (standart)	6,25	6,25
Depth of seeding, mm	20-50	20-50
Drill weight, kg, no more	935	1500
Operating rate in basic time, hectares per hour	2,0-4,8	3,0-7,2
Overall size in working position, mm, no more than:		
Length	2140	2140
Width	6800	10800
Height	1960	1960
Overall size in transport position, mm, not more than:		
Length	2200	7000
Width	3100	2500
Height	2350	2200
Mounted jn tractor s with drawbar categoru	1,4	1,4;2,0

Conformity certificate STB ISO 9001.
Customs tariff number 8432.

➤ WARRANTY-24 MONTHS

- FREE TRAINING OF MACHINE OPERATORS IS PROVIDED BY SPECIALISTS OF THE MANUFACTURER.
- INDIVIDUAL APPROACH TO THE CLIENT.
- CONSTANT AVAILABILITY OF SPARE PARTS IN THE WAREHOUSE OF THE MANUFACTURER AND DEALER.

The cost for 05.02.2021, the VAT rate-0% is:

Universal pneumatic seeders with anchor Coulter

SPU3 – 4 360,00 \$

SPU4 – 4 980,00\$

SPU6 – 7 590,00\$

Universal pneumatic seeders with disk Coulter

SPU3D – 5 100,00 \$

SPU4D – 5 890,00\$

SPU6D – 8 990,00\$

Universal pneumatic seeders with disk Coulter

SPU4L – 5 370,00\$

SPU6L – 8 175,00\$

Payment terms: 100% prepayment.

Term of shipment of the Goods is within 30 calendar dates from the date the advance payment reaches the Seller's account.

Products shall be delivered to the Buyer on FCA terms, warehouse of the Supplier Lida city, Ignatov street, 52, the Republic of Belarus (Incoterms 2010).

The commercial offer is valid for 30 calendar days.